

A Proposal for a Description Logic Interface

Sean Bechhofer[†], Ian Horrocks[†], Peter F. Patel-Schneider[‡]
and Sergio Tessaris[†]

[†]University of Manchester [‡]Bell Labs Research

Most description logic (DL) systems present the application programmer with a functional interface, often defined using a Lisp-like syntax. Such interfaces may be more or less complex, depending on the sophistication of the implemented system, and may be more or less compliant with the KRSS description logic specification [7].

The Lisp style of the KRSS syntax reflects the fact that Lisp is still the most common implementation language for DLs. This can create considerable barriers to the use of DL systems by application developers, who often prefer other languages (in particular the currently ubiquitous Java), and who are becoming more accustomed to component based software development environments.

In such an environment, a DL might naturally be viewed as a self contained component, the details of whose implementation, and even the precise location in which its code is being executed, is hidden from the application [2]. This approach has several advantages: the issue of implementation language is finessed; the API can be defined in some standard formalism intended for the purpose; a mechanism is provided for applications to communicate with the DL system, either locally or remotely; and alternative DL components can be substituted without affecting the application.

A CORBA Server for DL Systems

We have used the Object Management Group's (OMG) Common Object Request Broker Architecture (CORBA) [5] to build a generic DL server, to be used initially with both the FaCT and iFaCT systems [4]. CORBA was chosen because it is not tied to any particular language or platform. In particular, CORBA can be used with both Lisp and Java running on both Unix and Microsoft platforms.

The CORBA solution has all the advantages mentioned above.

- It facilitates the use of the Lisp implementations by non-Lisp client applications, for example in the TAMBIS (Transparent Access to Multiple Bio-

logical Information Systems) project, where the DL server is used by a Java client [1].

- The generic API is defined using CORBA's Interface Definition Language (IDL), which can be mapped to various target languages.
- The application communicates with the DL via a CORBA Object Request Broker (ORB). The DL server and client application may or may not be running on the same physical machine.
- It would be possible to substitute FaCT or iFaCT with another DL reasoner, for example DLP [6], without client applications even being aware of the change.

It has been decided *not* to pass concepts and roles as objects: treating them as objects does not seem natural (as they have no functionality), and could lead to a significant increase in overheads (as determining their structure might require many object requests via the ORB). However, the CORBA IDL does not support the definition of the kinds of recursive data type that would be required for the representation of DL concepts and roles.

The solution adopted is to pass concepts and roles as single data items using eXtended Markup Language (XML) [8]. The advantages of using XML are that it is becoming a widely accepted standard, it naturally lends itself to the definition or recursive structures, and there are parsers available for several languages (including Lisp and Java).

System Architecture

Only a minimal interface to the DL reasoner has been defined. It is intended that additional functionality and more sophisticated interfaces be provided by other components, which would be clients of the DL reasoner. Client applications would then interact with an interface component. All these interactions make use of the ORB bus, as shown in Figure 1.

This architecture provides a mechanism for developing a complete DL system with interchangeable reasoning and interface components. It is even envisaged that sub-components of the DL system, such as subsumption reasoner, Abox reasoner and hierarchy maintenance, could be separated. This would facilitate the cooperative development of systems and the rapid integration of new components, regardless of their implementation language.

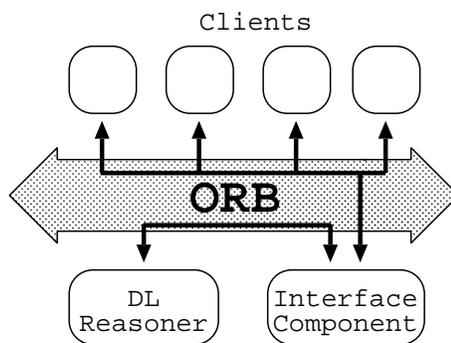


Figure 1: FaCT server Architecture

The Client Interface Component

The interface provided by the DL reasoner is little more than ORB access to a Lisp evaluate and print loop. A separate Interface Component has been implemented (in Java), and provides a more sophisticated object oriented API for use by client applications. This API is seen as an object in the CORBA namespace, and provides operations which clients use to interact with the DL; the interface seen by clients is thus separated from the real reasoning engine. Even this API is very simple, and it is anticipated that many applications would want to augment it either directly or by interposing another level of indirection. Moreover, the current API only considers Tbox reasoning, and would need to be extended if an Abox reasoner were added to the system.

The interface conforms to a standard “tell and ask” format: facts are asserted to the knowledge base (KB) and queries answered without the user specifying when or how reasoning should be performed. In order to improve efficiency, and to support the (future) possibility of multi-user access to a KB, the interface has a simple transaction control mechanism. This mechanism could also be augmented with partial (complete) roll-back: the ability to undo the last (an arbitrary number of) transactions.

Before performing any tell operations, a client must perform a `begin_transaction` operation; if this is successful it can be followed by any number of tell operations. A transaction can be ended either with an `end_transaction` or an `abort_transaction` operation, the latter having the effect of discarding all the tell operations performed since the transaction began. Any ask operations performed during a transaction will be answered in the normal way, but will not reflect any of the tell operations in the incomplete transaction. As well as providing a simple locking mechanism, grouping tell operations in this way gives the system a hint as to when it might be sensible to perform some reasoning, without introducing

an explicit “classify” operation.

Errors are signaled by raising exceptions (a standard feature of CORBA). The different types of exception are:

kr.transaction_required The requested operation can only be performed in the context of a transaction.

kr.op_unimplemented The requested operation is not implemented by the server.

kr.expr_error Concept or role syntax error. This also covers the case of unimplemented operators.

The small number of exception types is due to the simplicity of the interface and the decision not to consider any kind of KB condition (e.g., concept or KB unsatisfiability) as an error. Many `kr.op_unimplemented` errors could of course be raised, depending on the capabilities of the DL reasoner.

Return	Operation	Parameters	Meaning
void	<code>defconcept</code>	CN	$\text{CN} \sqsubseteq \top$
void	<code>defrole</code>	RN	$\text{RN} \sqsubseteq \top \times \top$
void	<code>implies_c</code>	C_1, C_2	$C_1 \sqsubseteq C_2$
void	<code>equal_c</code>	C_1, C_2	$C_1 \doteq C_2$
void	<code>implies_r</code>	R_1, R_2	$R_1 \sqsubseteq R_2$
void	<code>equal_r</code>	R_1, R_2	$R_1 \doteq R_2$
void	<code>transitive</code>	RN	RN is transitive
void	<code>functional</code>	RN	RN is functional
void	<code>clear</code>		$\mathcal{T} := \emptyset$

Table 1: Tell operations

The available tell and ask operations are summarised in Table 1 and Table 2, where **CN** is a concept name, **RN** is a role name, C is a concept, R is a role, \mathcal{CN} is a set of sets of concept names, \mathcal{RN} is a set of sets of role names, \mathcal{P} is a triple $(\mathcal{CN}_1, \mathcal{CN}_2, \mathcal{CN}_3)$, and \mathcal{T} is the set of axioms that make up the KB. The \mathcal{CN} and \mathcal{RN} data types are used to return sets of named concepts or roles, each of which may have a set of synonyms; in such cases no one name can or should be preferred over the others. The \mathcal{P} data type is used to return a concept’s position in the hierarchy, were it to be classified, in terms of its direct subsumers (\mathcal{CN}_1), synonyms (\mathcal{CN}_2) and direct subsumees (\mathcal{CN}_3).

All concept and role names are assumed to be atomic primitives, and the `defconcept` and `defrole` operations are provided only for completeness. For efficiency, some optimisation would be required (either in the interface component

Return	Operation	Parameters	Meaning
\mathcal{CN}	direct_supers_c	CN	direct subsumers of CN
\mathcal{CN}	all_supers_c	CN	all subsumers of CN
\mathcal{CN}	direct_subs_c	CN	direct subsumeers of CN
\mathcal{CN}	all_subs_c	CN	all subsumeers of CN
\mathcal{RN}	direct_supers_r	RN	direct subsumers of RN
\mathcal{RN}	all_supers_r	RN	all subsumers of RN
\mathcal{RN}	direct_subs_r	RN	direct subsumeers of RN
\mathcal{RN}	all_subs_r	RN	all subsumeers of RN
\mathcal{P}	taxonomy_position	C	taxonomy position of C
boolean	satisfiable	C	$(\perp \sqsubseteq C)?$
boolean	subsumes	$C_1,$	$(C_1 \sqsubseteq C_2)?$
boolean	equivalent	C_1, C_2	$(C_1 \doteq C_2)?$

Table 2: Ask operations

or the DL reasoner), e.g., the conversion of general axioms to definition axioms whenever possible [3].

References

- [1] P. G. Baker, A. Brass, S. Bechhofer, C. Goble, N. Paton, and R. Stevens. Tambis: Transparent access to multiple bioinformatics information sources: an overview. In *Proceedings of ISMB98*, 1998.
- [2] S. K. Bechhofer, C. A. Goble, A. L. Rector, W. D. Solomon, and W. A. Nowlan. Terminologies and Terminology Servers for Information Environments. In *Proceedings of STEP97*, pages 484–497, 1997. IEEE Computer Society.
- [3] I. Horrocks. *Optimising Tableaux Decision Procedures for Description Logics*. PhD thesis, University of Manchester, 1997.
- [4] I. Horrocks. FaCT and iFaCT. In *Proceedings of DL'99*, to appear.
- [5] The Object Management Group. *The Common Object Request Broker: Architecture and Specification*, 1998.
- [6] P. F. Patel-Schneider. DLP system description. In *Collected Papers from (DL'98)*, pages 87–89. CEUR, 1998.
- [7] P. F. Patel-Schneider and B. Swartout. Description logic specification from the KRSS effort, June 1993.
- [8] Extensible markup language (XML) 1.0. W3C Recommendation TR REC-xml-19980210, February 1998. Editors T. Bray, J. Paoli, C. M. Sperberg-McQueen.