

Extensive Comparative Study: Robust Face Recognition System with Various Normalization Techniques

Raj Kumar Sahu, Research Scholar, J.N.U., Jodhpur
Dr. Yash Pal Singh, Director, S.I.T.M. Rewari
Dr. Abhijit Kulshrestha, Professor, J.N.U. Jhopur

ABSTRACT

Face recognition is a computer based person identification technique based on arithmetical and numerical features obtained from face images. In a face recognition system, illumination has been a great problem. In this work, light variation is tried to dominate to increase recognition rate. To improve the face recognition rate further, a novel technique is adopted, where facial images are vertically divided into two equal halves and D2DPCA dimension reduction technique is applied in each halves. Normalization is performed by two different techniques, which are Min-Max and Z-Score recognition rates achieved by them are 95.76% and 95.90 respectively. Comparing proposed technique with conventional technique, Hence it is shown that proposed technique works well for illumination variant images and D2DPCA is better dimension reduction tool than 2DPCA.

INTRODUCTION

Biometrics refers to the use of physiological and behavioral characteristics for an automatic human recognition system [1, 2]. Human recognition deals with two different tracts: person identification and person authentication. Identification is the determining the individuality of a person from a scene including different background, while authentication deals with recognizing a person from a group of persons which is termed as database. An automatic human recognition system must be capable of successful acceptance of truth and rejection of false data which is not registered in the database. Such automatic authentication system has wide area of application such as human computer interface, security system, banking sector, network security, database management, office and building access, e-commerce, teleconferencing etc. Now a day biometrics has entered in security system of various digital equipments also like cell phones, laptops, cars, etc. Out of various biometrics, the most commonly used six of them are face recognition, finger print, signature verification, iris recognition, lip reading and hand gesture recognition technologies.

The face is one of the most acceptable biometrics because of its visual interactions. Unlike other biometrics, face recognition is non-intrusive and can be used even without having subject's sufficient knowledge. In other biometrics

like fingerprint, voice, iris and DNA, there always persists the problem of data acquisition. Illumination variation has been a big challenge in achieving good recognition rate in security system like ATM's, Banking sectors, Scanners etc. The work proposed in this thesis is to provide robustness against illumination variation. It is extension of face recognition system, as proposed by Sang Heon et. al. [3]. In their work, they designed a face recognition system to counter problem in identification during dim light conditions.

The block diagram of a face recognition system is shown in Fig.1. It consists of four components viz face detection, face alignment, feature extraction and classification.

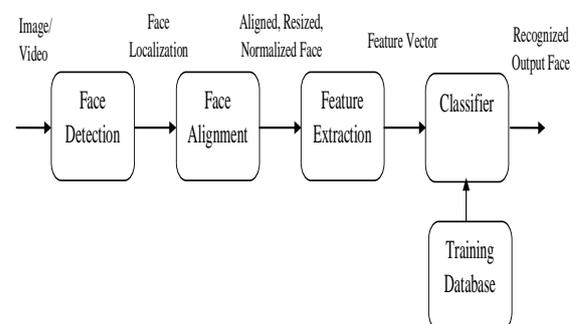


Fig.1: Block Diagram of Face Recognition System [4]

First stage is face detection, where human faces are found out in an input image. After detection, faces are aligned centrally to extract facial features like eyes, brows, cheeks, ears, nose, or the facial contour. Face image are then preprocessed like rotated, masked, resized and normalized. Feature extraction is performed on a normalized facial image. The extracted features in the form of mathematical data are sent to a classifier and compared with the database.

RELATED WORK

Various numbers of research papers from different journals and conferences, related to, face recognition techniques has been studied [3, 5-16]. It is observed that there are still lots of problems, prevailing in this technique, which are needed to be counter. Below is a report of related research survey in the proposed area of research.

Two widely used feature extraction techniques, Principal Component Analysis and Linear Discriminant Analysis, have been deeply reviewed. On the basis of study it is found that, PCA performs generalization of data by reducing the feature space dimension through variance of the input data. Features are selected in such a way that maximum information is retained in a small feature space. While PCA performs generalization of the input data, LDA performs discrimination of the input data through dimension reduction. LDA projects the input data on a lower dimensional space such that it has discriminated pattern. Hence LDA maximizes the scatter between different classes and minimize the scatter between the input classes. Both of these techniques have advantages over each other. PCA might outperform LDA, when the number of samples per class is small and LDA outperforms PCA with a large number of samples in training dataset. LDA is better than PCA, when training datasets are different. However, PCA is better than LDA, when dimension of face images is high. As Illumination had been a great problem in face recognition system, Differential 2-dimensional PCA is an effective tool to dominate light variation effect. This enhanced technique followed by normalization and fusion can be implemented on the light variant images to increase the accuracy.

PROBLEM IDENTIFICATION

Various Problems are listed out on the basis of literature survey [3, 17-21]. The sources of deviation in the facial appearance can be classified as two factors. Intrinsic factors are due to the physical properties of the face, but independent of the observer. It is subdivided into intrapersonal and interpersonal. Intrapersonal include variation in the facial appearance of an individual, such as being ageing effect, facial expression variation and occlusions. Interpersonal factors are due to differences in the facial appearance of different people, such as unevenness, identity deviation. Extrinsic factors are due to external effects.

Out of these entire problems, illumination variation and large dimensionality are generally faced in security systems, which are being worked out in this work.

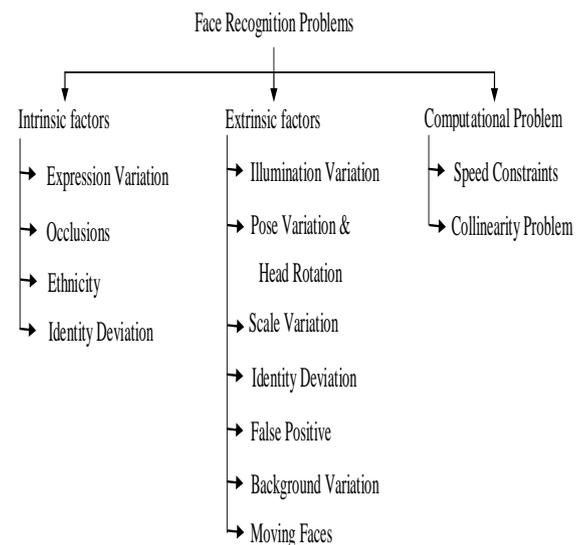


Fig.2: Categorization of Face Recognition Problems

METHODOLOGY

This work is divided into two sections, conventional method and proposed method. In conventional method, complete face image is used and applied with PCA, Subspace LDA, 2DPCA and D2DPCA. In proposed method, face images are divided into two vertical left and right halves. Each halves are then applied with 2DPCA and D2DPCA followed by normalization and fusion techniques. Sang Heon et. al. [3] designed system by D2DPCA followed by sigmoid function normalization technique. In this work, a face recognition system is designed by D2DPCA followed by two different normalization techniques which are Min-Max, Z-Scorer function [28].

The facial images used in this work are collected from Cropped Extended Yale Face Database B+ [22]. The database provided facial images of 38 different persons having 64 images under different illumination condition. Out of 64 illuminations variant facial images, 5 images, which have more or less same illumination intensity, are taken for training and rest of 59 images is kept for testing purpose.

PRINCIPAL COMPONENT ANALYSIS (PCA)

Turk et. al. [10] used eigen values for PCA, so it is also termed as Eigenface method. In this method, variance due to non-face images are eliminated and variation just coming out of the variation between the face images are collected for analysis.

SUBSPACE LINEAR DISCRIMINANT ANALYSIS (SLDA)

Belhumeur et. al. [17] used LDA to maximize the scatter between different classes and minimize the scatter between the input data in the same class. LDA overcome drawback of PCA of restriction to small image database. It is achieved by projecting the image onto the eigenface space by PCA and then implementing pure LDA over it, to classify the eigenface space projected data.

2-DIMENSIONAL PCA AND DIFFERENTIAL 2-DIMENSIONAL PCA

Yang et al. [9] first proposed 2DPCA which extracts the features from the 2 dimensional image matrixes by projecting it over the eigenface space projection axes. D2DPCA is obtained by taking difference of two consecutive row wise elements of 2DPCA projection matrix at eigen face space. It reduces dimension and increases uniqueness in 2DPCA projection matrix.

PROPOSED METHOD

Facial images are divided into two vertical halves. 2DPCA and D2DPCA are separately applied on both halves. Euclidean distance measures are calculated between test and training half images. These distances are then normalized by sigmoid function followed by their fusion. Finally minimum value of these fused scores is used to recognize identity of test. Four different types of normalization techniques are used over Euclidean distance; these are Min-Max, Z-Score normalization. The face recognition system adopted in this work is having five phases-

1. Face Image Database Acquisition- The size of each image is 168x192 pixels, with 256 grey levels per pixel are resized to 48x42 pixels. Training images have more or less same illumination intensity. After which they are divided into two equal halves by vertical line passing through nose tip. Both of these half images are then histogram equalized.
2. Feature Extraction - In PCA, face images are converted into a single column vectors and then all face vectors are appended column wise. To increase efficiency, D2DPCA is used where facial images are not converted into vector but they are concatenated as matrices page by page.

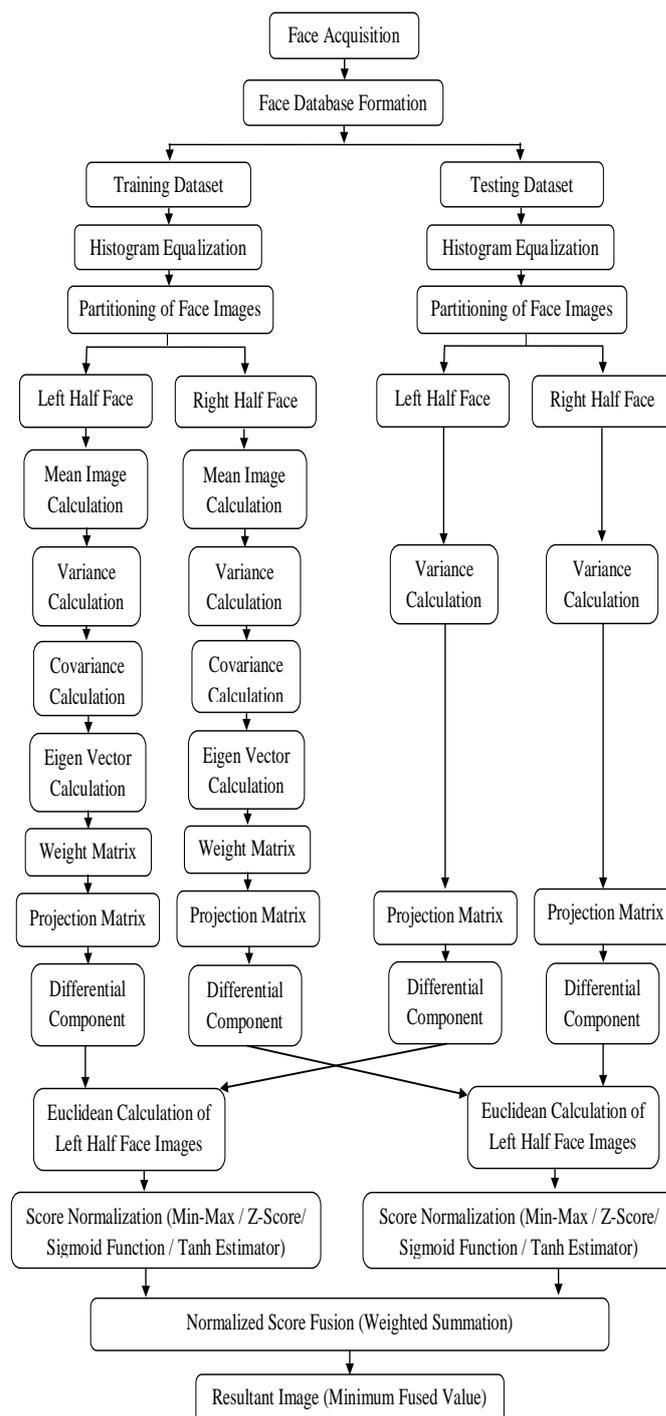


Fig.3: Flowchart of Proposed Method

3. Normalization Techniques- Distance Score between each of left and right half projected training image and projected test image is then normalized. By normalization, distance scores of each of left and right half face image are mapped between 0 and 1. Normalization Techniques used here are Min-Max Normalization, Z-Score, Sigmoid Function, Tanh Estimator Normalization Technique.
4. Fusion Technique- Feature level fusion refers to combining different feature vectors [35]. For

homogeneous features, a single resultant feature vector can be calculated as a weighted average of the individual feature vectors. However for non-homogeneous features, then they can be concatenated to form a single feature vector. Here fusion is being performed by weighted summation method, which is homogenous feature level fusion of pre-classification type fusion.

5. Recognition- At this stage, test image is recognized from training image database. To carry out this task, simply minimum value of fused score is found.

RESULTS AND DISCUSSIONS

Results of various face recognition techniques utilizing different algorithms are found out and then their recognition rates are compared at varying PCA features. These face recognition systems are implemented using

MATLAB version R2010a. In conventional method, training of system is performed by taking whole face image and face recognition system is applied with PCA, LDA, 2DPCA and D2DPCA. In proposed method, each training facial images are divided into two halves, classified with test image, normalized and finally fused, these images are applied with 2DPCA and D2DPCA algorithms. Recognition rate of each algorithm is represented with varying number of PCA features. As PCA and LDA are single dimension techniques, their eigenface space dimension is equal to number of facial images in training database. While 2DPCA and D2DPCA are two dimensional techniques, here eigenface space dimension is dimension of image. But in the proposed method, face images are divided into two halves and then applied with 2DPCA and D2DPCA, so in this case dimension will get halved. So dimension reduction is better in proposed method.

Table 1 is showing recognition rates of various techniques adopted in this work. Here numbers of PCA features are kept same for every technique i.e. 14 numbers.

Table 1: Summary of Recognition Rate Results By Various Approaches

The First Approach by Using Whole Face Image (Without Partitioning)		
Recognition Algorithms		Maximum Recognition Rate
PCA		29.21%
LDA		67.61%
2DPCA		36.93%
D2DPCA		72.79%
The Second Approach of Using Half Face Images (By Partitioning)		
Recognition Algorithms	Image	Maximum Recognition Rate
2DPCA	Left Face	50.93%
	Right Face	49.64%
	Fusion	52.10%
D2DPCA	Left Face	85.68%
	Right Face	79.61%
	Fusion	95.90%

Table 2 is giving comparison of recognition rate of previous method and proposed method. For Cropped Extended Yale Face Database B+ [22], recognition rate by

Sang Heon et. al. [3] is 95.59%, while for our method it is 95.90%, which is around 0.31% greater than previous work.

Table 2: Comparison of Recognition Rates of this work with Previous Method

System	Normalization Technique	Recognition Rate
Sang-Heon et.al.[3]	Sigmoid Function	95.59%
Our Method	Min-Max Function	95.76%
	Z-Score Function	95.90%

On the basis of methodology explained, class wise and features wise variation in recognition rates for various algorithms are compared. Here D2DPCA based feature extraction technique with Z-Score Function is giving maximum recognition rate of 95.90%.

CONCLUSION AND SCOPE OF FURTHER WORK

A face recognition system is designed to overcome the problem due to illumination variation effect in face. On the basis of literature reviews, it is found that illumination variation is one of the great problems, which is needed to be worked upon. Cropped Extended Yale Face Database B+ [22] provided a rich database of 38 persons with each having 64 different illumination conditions. In the first part of this thesis, conventional methods such as PCA, LDA, 2DPCA, D2DPCA are applied over training face database having 5 images and 59 images in testing database for each of 38 persons. Recognition rate achieved are 29.21%, 69.61%, 36.93% and 72.79% respectively for these two feature extraction algorithm. In the second part, a technique proposed where each face images are vertically divided into two halves. 2DPCA and D2DPCA are applied on each halves separately. Euclidean distance is calculated between training and testing half images followed by normalization and fusion technique. For two different normalization techniques, which are min-max, z-score recognition rate achieved are 95.76% and 95.90% respectively. Recognition rate, on the similar database, performed by Sang-Heon et. al. [3] was 95.59% and the same is around 95.90% for this work.

As mentioned ageing, expression variation, occlusion, head rotations are challenges for an automatic face recognition system, so system should be designed considering these parameters also. Proposed image based feature extraction technique cannot be used in feature based system, as facial features cannot be obtained in case of dim lighting conditions. So a feature based system can be designed. Moreover, in case of very large database, D2DLDA can be used for system design. Also live video database can be used, where face tracking and detection is performed before identification.

REFERENCES

[1]. A. K. Jain, A. Ross and S. Prabhakar, "An Introduction to Biometric Recognition", IEEE

Transaction on Circuits Systems Video Technology, vol. 14, no. 1, pp. 4–20, 2004.

[2]. N. K. Ratha, A. W. Senior and R. M. Bolle, "Automated Biometrics", in Proceedings of the International Conference on Advances Pattern Recognition, pp. 445–474, 2001.

[3]. Sang-Heon Lee, Dong-Ju Kim and Jin-Ho Cho, "Illumination-Robust Face Recognition System Based on Differential Components", IEEE Transactions on Consumer Electronics, Vol. 58, No. 3, PP. No. 963-970, August 2012.

[4]. R. Chellappa, C. L. Wilson, and S. Sirohey, "Human and Machine Recognition of Faces: A Survey", Proceedings of the IEEE, Vol.83 Issue 5, pp 705-740, 1995.

[5]. Qi Zhu, Yong Xu, "Multi-directional two-dimensional PCA with matching score level fusion for face recognition", Neural Computing & Application, Springer, 2012.

[6]. Yong Zhang, Christine McCullough, John R. Sullins and Christine R. Ross, "Hand-Drawn Face Sketch Recognition by Humans and a PCA-Based Algorithm for Forensic Applications", IEEE Transactions on Systems, Man, And Cybernetics-Part A: Systems And Humans, Vol. 40, No. 3, PP. No. 475-485, May 2010.

[7]. Yanwei Pang, Dacheng Tao, Yuan Yuan, and Xuelong Li, "Binary Two-Dimensional PCA", IEEE Transactions On Systems, Man, And Cybernetics-Part B: Cybernetics, Vol. 38, No. 4, PP. No.1176-1180, August 2008.

[8]. Jian Yang and Chengjun Liu, "Horizontal and Vertical 2DPCA-Based Discriminant Analysis for Face Verification on a Large-Scale Database", IEEE Transactions On Information Forensics And Security, Vol. 2, No. 4, PP. No. 781-792, December 2007.

[9]. Jian Yang, David Zhang, Alejandro F. Frangi and Jing-yu Yang, "Two-Dimensional PCA: A New Approach to Appearance-Based Face Representation and Recognition", IEEE Transactions On Pattern Analysis And Machine Intelligence, Vol. 26, No. 1, PP. No. 131-137, January 2004.

[10]. M. A. Turk and A. P. Pentland, "Face recognition using eigenfaces", IEEE Computer Society Conference on Computer Vision and Pattern Recognition, CVPR'91, PP. No. 586- 591, 1991.

[11]. Jamal Ahmad Dargham, Ali Chekima and Ervin Gubin Moug, "Fusion of PCA and LDA Based

- Face Recognition System”, International Conference on Software and Computer Applications, IACSIT Press Singapore, Vol-41, PP. No. 111-116, 2012.
- [12]. Zizhu Fan, Yong Xu and David Zhang, “Local Linear Discriminant Analysis Framework Using Sample Neighbors”, IEEE Transactions On Neural Networks, Vol. 22, No. 7, PP. No. 1119-1132, 2011.
- [13]. H. Hu, P. Zhang and F. De La Torre, “Face Recognition Using Enhanced Linear Discriminant Analysis”, IET Computer Vision, Vol. 4, No. 3, PP. No. 195–208, 2010.25
- [14]. Wenming Zheng and Xiaou Tang, “Fast Algorithm for Updating the Discriminant Vectors of Dual-Space LDA”, IEEE Transactions on Information Forensics and Security, Vol. 4, No. 3, PP. No. 418-427, 2009.
- [15]. Dao-Qing Dai and Pong C. Yuen, “Face Recognition by Regularized Discriminant Analysis”, IEEE Transactions on Systems, Man, And Cybernetics-Part B: Cybernetics, Vol. 37, No. 4, PP. No. 1080-1085, 2007.
- [16]. A. Jain, K. Nandakumar and A. Ross, “Score Normalization in Multimodal Biometric Systems”, Pattern Recognition, Vol. 38, PP. No. 2270-2285, 2005.
- [17]. Peter N. Belhumeur, “Ongoing Challenges in Face Recognition”, Frontiers of Engineering: Reports on Leading-Edge Engineering, National Academy of Engineering, National Academy Press, pp. 5-14, 2006.
- [18]. R.S. Malpass and J. Kravitz, “Recognition for faces of own and other race faces”, Journal of Personality and Social Psychology, Vol. 13, pp. 330–334, 1969.
- [19]. H. Hill, P. Schyns, and S. Akamatsu., “Information and Viewpoint Dependence In Face Recognition”, Cognition, Vol. 62, pp. 201–202, 1997.
- [20]. A.M. Burton, S.Wilson, M. Cowan, and V. Bruce, “Face recognition in poor-quality video”, Psychological Science, Vol. 10, pp. 243-248, 1999.
- [21]. Tormod Naes, Bjorn Helge Mevik, “Understanding the Collinearity Problem in Regression and Discriminant Analysis”, Journal of Chemometrics, Vol. 15, pp. 413–426, 2001.
- [22]. www.vision.ucsd.edu/extyaleb/CroppedYaleBZip/CroppedYale.zip

ABOUT THE AUTHOR

Raj Kumar Sahu, working as Associate Professor ,with C.S.I.T, Durg, and presently he is pursuing his research from Jodhpur National University, Jodhpur, Faculty of Electronics and Communication Engg. His area of interest is Face Recognition System.

Prof. Dr. Y.P. Singh, currently working as Director, SOMANY (P.G.) Institute of Technology & Management, Rewari, Haryana, India. has also worked about 28 years as Lecturer, Dean of academics, Principal , Director in many Engineering institutions and organization. He has also served with Training and Technical Deptt., Govt. Of Delhi, almost for 17 years. He has about 52 research paper published in National and 48 papers published in international journals in his credit. He has been selected and awarded by Govt. of Delhi as “Best Technical Teacher-2004”. He has been awarded by Outstanding Teacher of the Year 2012 & 2013 .He is also an expert and Master Trainer for the Teachers, empanelled by SCERT/NCERT. He is also the guide of research scholar for almost dozen of Universities. His area of Research is mobile and wireless communication, digital signal processing, Development of algorithms for the Data processing.

Dr. Abhijit Kulshrestha, Professor & Head, Department of Physics, Faculty of Engineering and Technology, Jodhpur National University, Jodhpur.